


# INNOLIFT Self Loader


The Innolift is the only Manual or Electric lift loader that lifts a wide range of goods to a range of heights and then lifts itself in and out of the delivery vehicle.

Designed for use with Open or Closed bottom pallets, skid and crates, Innolift is ideal for moving Pallets, Medical equipment, Office Equipment Etc'

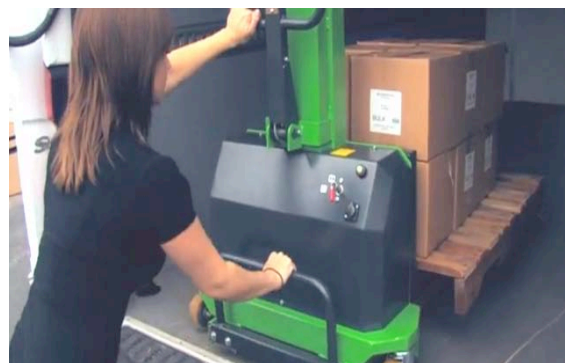

- ☑ Available in 9 different models, 1 manual Lift and 8 electric Lift
- ☑ Standard Colors are Green with Black... Five other colours available to order (POA)
- ☑ Lifts loads up to 600kg as high as 1300mm..
- ☑ Powered by a 12 Volt .8Kw motor and comes with separate automatic charger
- ☑ Optional Charging via the vehicle's Cigarette lighter plug as you drive

[Click here to see the video](#)

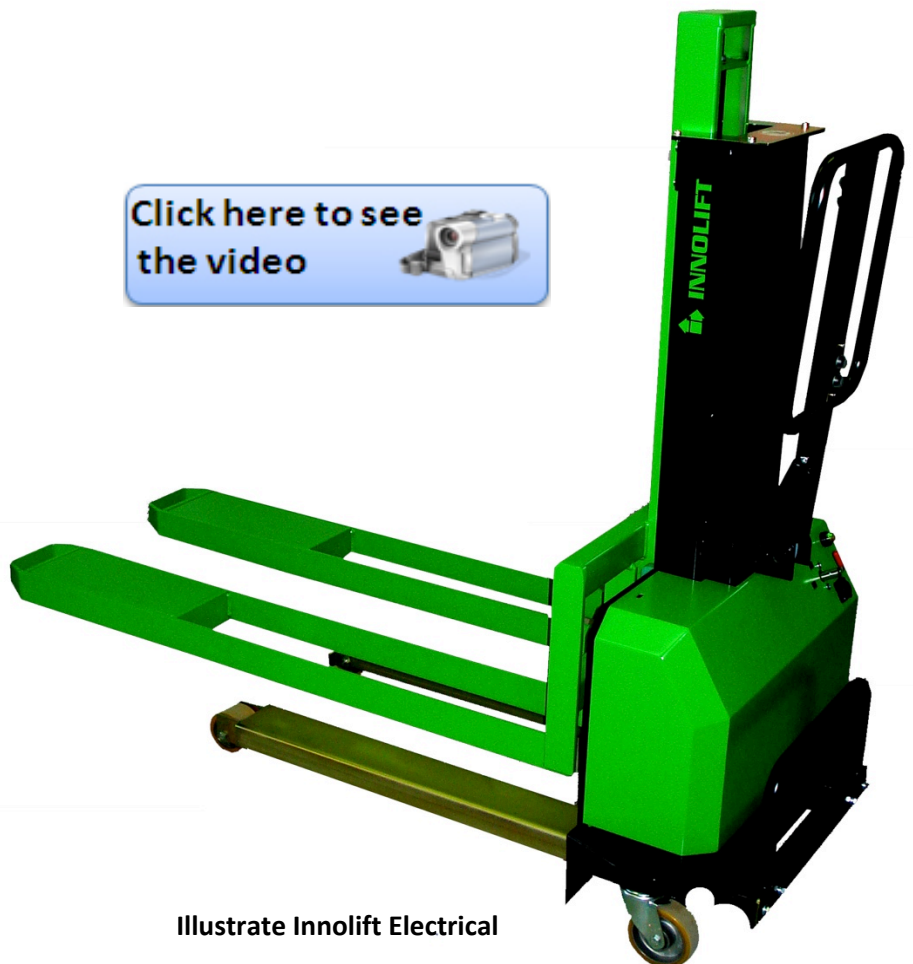

Illustrate Innolift Electrical

All prices/specifications subject to change without notice.

**Add 10%GST Australia only**

### COLOUR OPTIONS ...

Standard Colour - Green



Innolift - Silver



Innolift - Blue



Innolift Orange



Innolift - Red



Innolift - Yellow

Step A/... Measure the height of the door opening on your vehicle



Step B/...Decide whether you will lift Open or Closed type Pallets

Step C/... Select the Innolift model from our range below

Part Number	Description	OA Height	
<i>Overall Height (at original position) / 1080mm "For Vehicles with Door opening 1100mm or higher"</i>			
# IV300.800	Manual, Capacity 300kg, Loading Height 700mm	1080 mm	
# IS600.700	Electrical, Capacity 600kg, Loading Height 600mm	1080 mm	
<i>Overall Height (at original position) / 1200mm "For Vehicles with Door opening 1220mm or higher"</i>			
# IM600.800	Electrical, Capacity 600kg, Loading Height 700mm	1200 mm	
<i>Overall Height (at original position) / 1400mm "For Vehicles with Door opening 1420mm or higher"</i>			
# IL600.1000	Electrical, Capacity 600kg, Loading Height 900mm	1400 mm	
<i>Overall Height (at original position) / 1700mm "For Vehicles with Door opening 1720mm or higher"</i>			
# IXL500.1250	Electrical, Capacity 500kg, Loading Height 1150mm	1700 mm	
<i>Overall Height (at original position) / 1850mm "For Vehicles with Door opening 1870mm or higher"</i>			
# IXXL400.1400	Electrical, Capacity 400kg, Loading Height 1300mm	1850 mm	
<b>US Models for lifting "Closed" Pallets... Chep etc' onto Trucks and Vans</b>			
# IL600.1000.US	Electrical, Capacity 600kg, Loading Height 900mm - For closed pallet ( 1220 x 1020 ) mm	1400 mm	
# IXL.550.1250.US	Electrical, Capacity 600kg, Loading Height 1150mm - For closed pallet ( 1220 x 1020 ) mm	1700 mm	
# IXXL.500.1400.US	Electrical, Capacity 500kg, Loading Height 1300mm - For closed pallet ( 1220 x 1020 ) mm	1850 mm	

Part Number	Options	
<b>Options</b>		
# INNOLIFT-21226	Cable and Plug system for charging while driving	
# INNOLIFT-61974	Rear plate, Fixed (Nominate model number - NMN)	
# INNOLIFT-61598	Rear Plate, Adjustable ( covers 90% of the vehicles ) (NMN)	
# INNOLIFT-20251	AGM Power Battery 12V 44Ah - Spare Part	

All prices/specifications subject to change without notice.

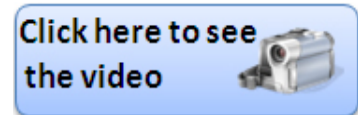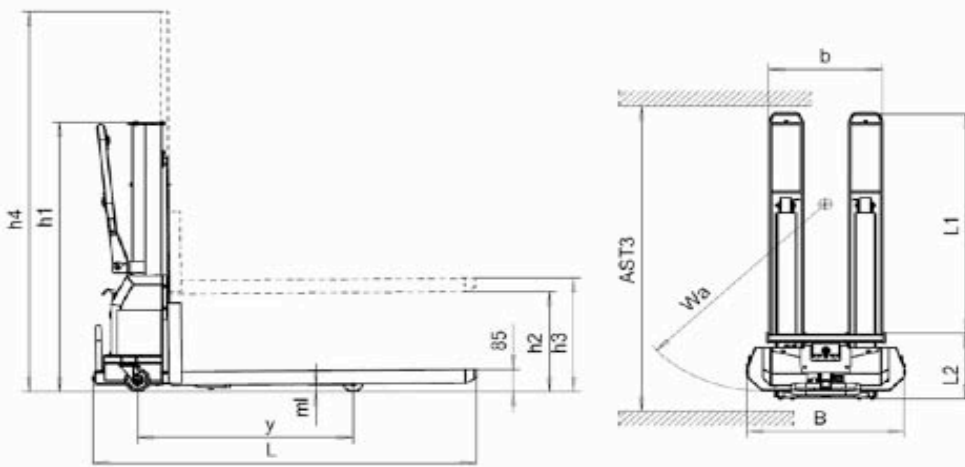

MODEL		IV300.800	IS600.700	IM600.800	IL600.1000	IL600.1000.US	IXL500.1250	IXL550.1250.US	IXXL400.1400	IXXL500.1400.US
Power		Manual	Battery	Battery	Battery	Battery	Battery	Battery	Battery	Battery
Capacity	kg	300	600	600	600	600	500	550	400	500
Load centre	mm	600	600	600	600	600	600	600	600	600
Lifting Height	mm h3	800	700	800	1000	1000	1250	1250	1400	1400
Loading Height	mm h2	700	600	700	900	900	1150	1150	1300	1300
Own Weight	kg	90	176	180	185	265	190	265	195	265
<b>Overall Lowered Height</b>	<b>mm h1</b>	<b>1080</b>	<b>1080</b>	<b>1200</b>	<b>1400</b>	<b>1400</b>	<b>1700</b>	<b>1700</b>	<b>1850</b>	<b>1850</b>
Overall Extended Height	mm h4	1080	1700	1900	2300	2300	2800	2800	2950	2950
Wheel material		Polyurthane	Polyurthane	Polyurthane	Polyurthane	Polyurthane	Polyurthane	Polyurthane	Polyurthane	Polyurthane
Wheel Dimensions, Front	mm	75 x 32	75 x 60	75 x 60	75 x 60	75 x 60	75 x 60	75 x 60	75 x 60	75 x 60
Wheel Dimensions, Rear	mm	100 x 40	100x 40	100x 40	100x 40	100x 40	100x 40	100x 40	100x 40	100x 40
Total Length	mm L	1480	1520	1520	1520	1520	1520	1520	1520	1520
Length without forks	mm L2	330	350	350	350	350	350	350	350	350
<b>Chassis width</b>	<b>mm B</b>	<b>700</b>	<b>760</b>	<b>760</b>	<b>760</b>	<b>1460</b>	<b>760</b>	<b>1460</b>	<b>760</b>	<b>1460</b>
Wheel base	mm Y	850	980	980	980	980	980	980	980	980
Fork Dimensions	mm	150 x 50	165 x 60	165 x 60	165 x 60	420 x 152	165 x 60	420 x 152	165 x 60	420 x 152
Fork Length	mm L1	1150	1190	1190	1190	1190	1190	1190	1190	1190
Fork width	mm b	500	540	540	540	540	540	540	540	540
Ground clearance	mm ml	0 - 30	0 - 30	0 - 30	0 - 30	0 - 13	0 - 30	0 - 13	0 - 30	0 - 13
Working Aisle AST3	mm	1750	1790	1790	1790	1790	1790	1790	1790	1790
Turning radius	mm Wa	980	1090	1090	1090	1090	1090	1090	1090	1090
Parking brake		Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Lifting motor	kw	-	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
Battery Capacity	V / Ah	-	12 / 44	12 / 44	12 / 44	12 / 44	12 / 44	12 / 44	12 / 44	12 / 44
Charger	V / A	-	12 / 10	12 / 10	12 / 10	12 / 10	12 / 10	12 / 10	12 / 10	12 / 10

All prices/specifications subject to change without notice.